

Three Reasons to Choose the FLEXpower Radian Integrated System from OutBack Power:

1. ENGINEERED FOR FASTER, EASIER INSTALLATION

- **Factory tested, pre-wired and pre-configured** system for fast installation
- Includes a fully integrated GS load center for quick and easy connections
- Charge controller, programming and networking components are completely integrated—just install the mounting bracket, hang the system on a wall, make the necessary connections, site specific programming and the system is fully operational
- Optimized system footprint for cleaner installations in half the time

2. DESIGNED FOR FLEXIBILITY

- **4kW:** Ideal for smaller power applications including homes, cabins, remote communication sites and backup power systems.
- **8kW:** Ideal for medium-sized power requirements including larger homes, light commercial or backup power systems.
- Radian inverter/charger is programmable for seven different operational modes, with generator assist
- Advanced Battery Charging (ABC) programmability accommodates traditional and advanced chemistry batteries


3. BUILT FOR DEPENDABLE, LONG-TERM USE

- **Extensive quality and reliability testing**
- 15 years of experience manufacturing and improving products for fault-intolerant, mission-critical applications
- Monitor, command and control from any internet-connected device with OPTICS RE
- Standard 5 year warranty (extended 10 year warranty available)
- Field-upgradable software, field-serviceable modular design and global technical support
- Components carry all of the necessary ETL certifications



FLEXpower Radian (FPR-8048A)

OutBack FLEXpower Radian Typical System Integration:

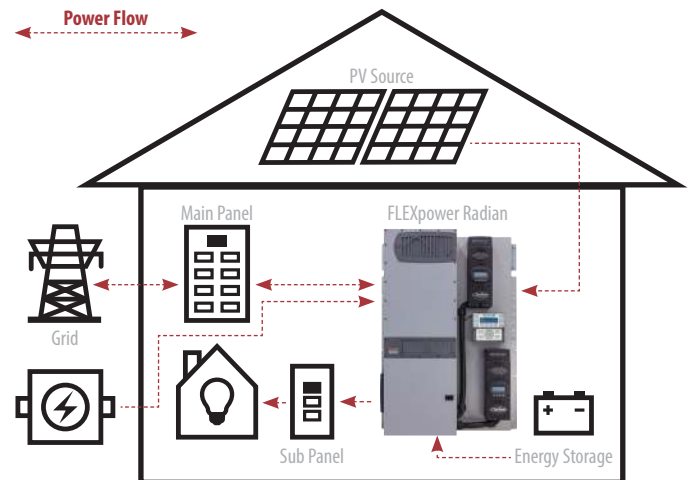

OUTBACK POWER—MASTERS OF THE OFF-GRID. FIRST CHOICE FOR THE NEW GRID.



MAKE THE POWER

- FLEXpower Integrated Systems
- Inverter/Chargers & Charge Controllers



STORE THE ENERGY

- EnergyCell RE, GH, NC and OPzV Batteries
- Battery Enclosures and Racking




MANAGE THE SYSTEM

- OPTICS RE System Monitoring and Control
- MATE3 System Display and Communications

| Model* | Description | Inverter | GSLC | Bypass | Inverter OCPD** | PV OCPD** | GFDI | RTS | Charge Controller |
|------------------|--------------------------|----------|---------------------|------------|-----------------|-----------|------|-----|-------------------|
| FPR-4048A | GS4048A FLEXpower Radian | GS4048A | GSLC175-PV1-120/240 | 120/240VAC | 175A | 80A | Yes | Yes | (1) FLEXmax 80 |
| FPR-8048A | GS8048A FLEXpower Radian | GS8048A | GSLC175-PV1-120/240 | 120/240VAC | (2) 175A | (2) 80A | Yes | Yes | (2) FLEXmax 80 |


| Details | FLEXpower Radian 4048A | FLEXpower Radian 8048A |
|--|--|--|
| Finished Dimensions H x W x D (in/cm) | 47.0 x 33.5 x 9.84 / 119.4 x 85.1 x 24.9 | 47.0 x 33.5 x 9.84 / 119.4 x 85.1 x 24.9 |
| Weight (lb/kg) | 195 / 88.5 | 250 / 113.4 |

*All pre-wired systems include a Radian Series inverter/charger, FLEXmax 80 charge controller(s), MATE3 system display and communications, FLEXnet DC system monitor, AC and DC wiring boxes, HUB10.3 communications, surge protector and remote temperature sensor (RTS). The FLEXpower Radian is also equipped with battery and PV array breakers, GFDI and input-output-bypass. See individual product specsheets or product guide for full specifications. **Overcurrent protective device.

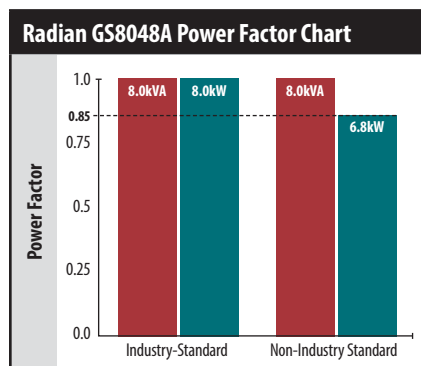

Power Rating Notes

Inverters that specify power in VA but do not use the unity standard Power Factor (PF) could have misleading power specifications. Volt-Amps (VA) is a total inverter output, while Watts (W) represent the power consumed by the electrical loads. PF, which varies by types of loads, is the ratio of W to VA, and the difference between the two is power in the circuit that does no useful work. At 1.0PF (unity), all power is used. This is the industry-standard used by OutBack Power.

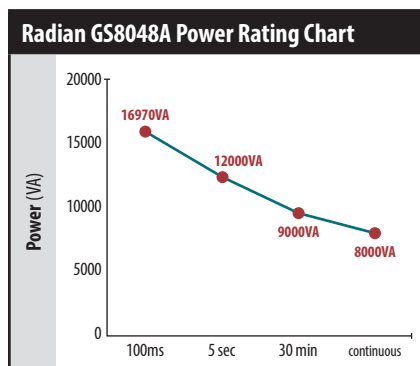

Instantaneous Power Rating

Most stringent, massive load start **GS8048A: 16970VA**

Surge Power Rating


Less stringent load start **GS8048A: 12000VA**

Peak Power Rating

Frequent "heavy duty" load requirements **GS8048A: 9000VA**

Continuous Power Rating

Sustained "real world" load requirements **GS8048A: 8000VA**

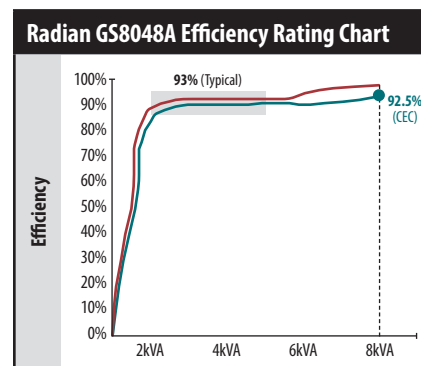

INVERTING

SELLING

Typical Efficiency Rating

Real world efficiency with variable loads **GS8048A: 93%**

CEC Efficiency Rating

Most stringent US rating **GS8048A: 92.5%**