


MSE PERC 72

High-Power PERC Module

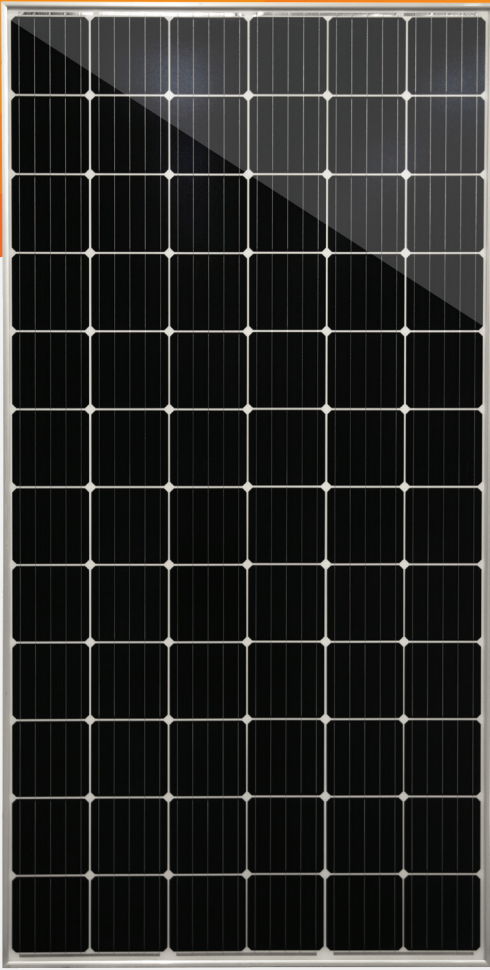

CERTIFIED RELIABILITY

- › Tested to UL1703 & IEC standards
- › PID resistant



ADVANCED TECHNOLOGY

- › PERC and 5 busbar drive >18% module efficiency
- › Ideal for all applications




EXTREME WEATHER RESILIENCE

- › 5631 Pa front and back load (117 psf) tested load to UL1703



BAA COMPLIANT FOR GOVERNMENT PROJECTS

- › Buy American Act
- › American Recovery & Reinvestment Act



365-375W

CLASS-LEADING POWER OUTPUT


18.89%

MAXIMUM EFFICIENCY

-0~+3%

POSITIVE POWER TOLERANCE

PRODUCT AND POWER WARRANTY

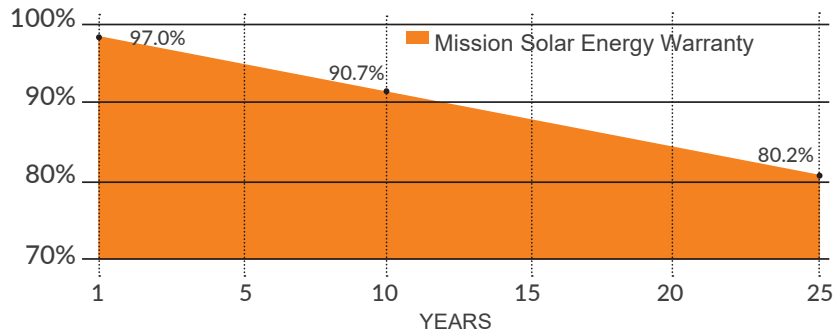

CERTIFICATIONS

IEC 61215/ IEC 61730/ IEC 61701/ UL 1703/ Salt mist



CEC



Please contact Mission Solar Energy if you have questions or concerns about certification of our products in your area.

¹Standard 12-year product warranty extendable to 25 years with registration

High-Power, High Quality

Mission Solar Energy is headquartered in San Antonio, TX with a module production facility on-site. We produce high-quality solar modules ensuring the highest power output and reliability to our customers. Our product line is well suited for residential, commercial, and utility applications. Every Mission Solar Energy solar module is certified and surpasses industry standard regulations, proving excellent performance over the long-term.

ELECTRICAL SPECIFICATIONS

Electrical Parameters at Standard Test Conditions (STC)

Module Type			MSE365SQ9S	MSE370SQ9S	MSE375SQ9S
Power Output	P _{max}	W _p	365	370	375
Module Efficiency		%	18.39	18.64	18.89
Tolerance			0~+3%	0~+3%	0~+3%
Short-Circuit Current	I _{sc}	A	9.705	9.767	9.826
Open-Circuit Voltage	V _{oc}	V	48.05	48.08	48.16
Rated Current	I _{mp}	A	9.236	9.323	9.432
Rated Voltage	V _{mp}	V	39.52	39.69	39.76
Fuse Rating			20	20	20

CERTIFICATIONS & TESTS

IEC

61215 / 61730 / 61701/ Salt mist

UL

UL 1703 listed



TEMPERATURE COEFFICIENTS

Normal Operating Cell Temperature (NOCT)	46.43°C (±2°C)
Temperature Coefficient of P _{max}	-0.375%/°C
Temperature Coefficient of V _{oc}	-0.280%/°C
Temperature Coefficient of I _{sc}	0.045%/°C

OPERATING CONDITIONS

Maximum System Voltage	1,500Vdc
Operating Temperature Range	-40°C (-40°F) to +85°C (185°F)
Maximum Series Fuse Rating	20A
Fire Safety Classification	Type 1, Class C
Front & Back Load (UL standard)	5631 Pa (117 psf) Tested to UL1703 standard
Hail Safety Impact Velocity	25mm at 23 m/s


MECHANICAL DATA

Solar Cells	P-type mono-crystalline silicon (156.75mm)
Cell Orientation	72 cells (6x12), 5 busbar
Module Dimension	1987mm x 999mm x 40mm (78.23 in. x 39.33 in. x 1.58 in.)
Weight	21.6 kg (47.6 lb)
Front Glass	3.2mm (0.126 in.) tempered, low-iron, anti-reflective coating
Frame	Anodized aluminum alloy
Encapsulant	Ethylene vinyl acetate (EVA)
J-Box	Protection class IP67 with 3 bypass-diodes
Cables	PV wire, 1.2m (47.24 in.), 4mm ² / 12 AWG
Connector	MC4 Compatible

SHIPPING INFORMATION

Container FT		Pallets	Panels	375 W		
53'	Double stack	30	780	292.50 kW		
40'	Double stack	24	624	234.00 kW		
Pallet		Panels	Weight	Height	Width	Length
		26	1,325lbs	45.50"	45.50"	79.50"

MSE370SQ9S: 370WP, 72 CELL SOLAR MODULE CURRENT - VOLTAGE CURVE

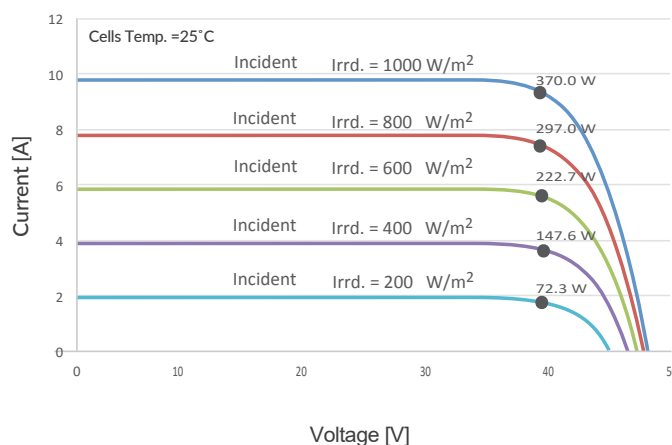

Current-voltage characteristics with dependence on irradiance and module temperature

BASIC DESIGN (UNITS: mm)

