

SLP030S-12U

High Efficiency Monocrystalline PV Module


- Nominal 12V DC for standard output.
- Outstanding low-light performance.
- Heavy-duty anodized frames.
- High transparent low-iron, tempered glass.
- Designed to withstand high wind pressures, hail and heavy snow.
- Quality aesthetic appearance.

30 CELL
MONOCRYSTALLINE MODULE

30W
POWER OUTPUT

20.00%
MODULE EFFICIENCY

5%
POSITIVE TOLERANCE

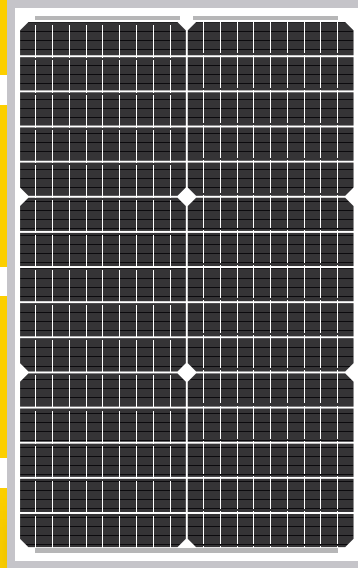

High Efficiency

Module Efficiency improved through advanced cell technology and manufacturing capabilities



High PID Resistance

Advanced cell technology and qualified materials lead to high resistance to PID




Withstands Harsh Environment

High PID resistance
5400 Pa positive load
2400 Pa negative load
Salt mist (IEC 61701)


Performance Warranty


10 years
Product Warranty

25 years
Power Warranty

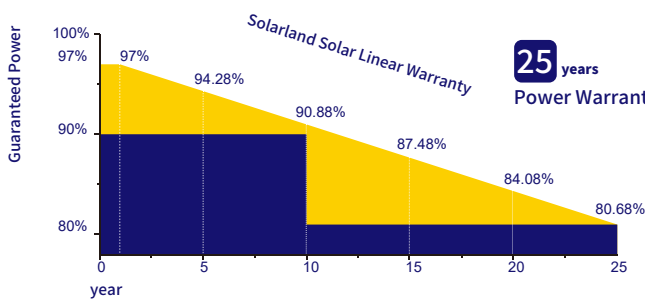


Product Certificate	IEC 61215, IEC 61730
Management Certificate	ISO 9001: 2016
Other certificate	Fire Rating Class C, TÜV Rheinland
Positive mechanical load	>5400Pa
Positive Power Tolerance	0~+5W
Warranty Information	2 Year Product Warranty and Workmanship



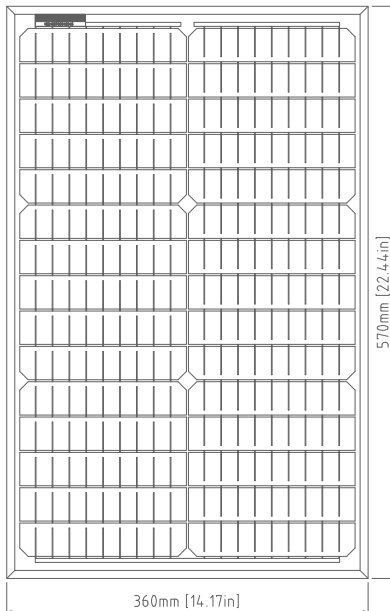


Electrical Characteristics	SLP030S-12U
Product code	030031201A
Maximum power (Pmax)	30W
Voltage at Pmax (Vmp)	17.37V
Current at Pmax (Imp)	2.08A
Open-circuit voltage (Voc)	20.04V
Short-circuit current (Isc)	2.19A
Temperature coefficient of Voc	-(80±10)mV/°C
Temperature coefficient of Isc	(0.065±0.015)%/°C
Temperature coefficient of power	-(0.5±0.05)%/°C
NOCT (Air 20°C; Sun 0.8kW/m² wind 1m/s)	47±2°C
Operating temperature	-40°C to 85°C
Maximum system voltage	1000V DC
Power tolerance	± 5%


*STC: Irradiance 1000W/m², AM1.5 spectrum, module temperature 25°C
 *NOCT: Nominal operating cell temperature (the data is only for reference)

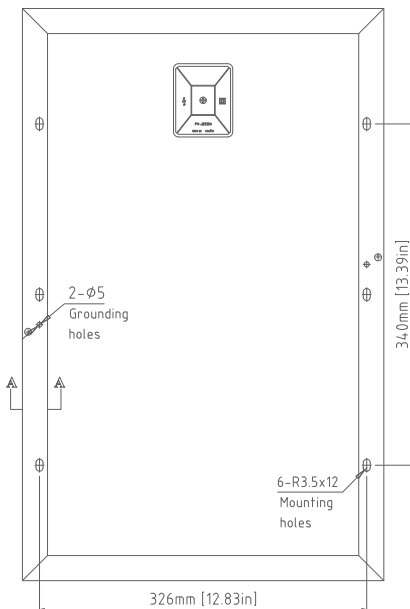

Specifications	SLP030S-12U
Cells	Monocrystalline silicon solar cell
No. of cells and connections	30(2X15)
Module dimension	570mm[22.44in.]x360mm[14.17in.]x30mm[1.18in.]
Weight	2.54kg[5.61lbs]
Packing information(Carton)	620mm[24.41in.]x410mm[16.14in.]x60mm[2.36in.]/(1pc/ctn)




Junction Box
Top View (Lid Open)



Section A-A

Characteristics

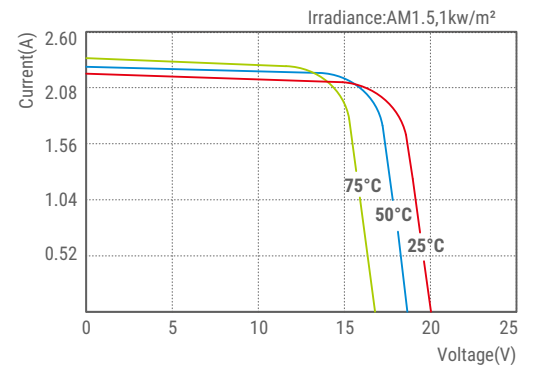

SLP030S-12U I-V Curves

Dimensions in brackets are in inches.
 Un-bracketed dimensions are in millimeters.
 Unit: mm[in.]