



# NETWORKING STACKED PT-100's WITH STACKED INVERTERS

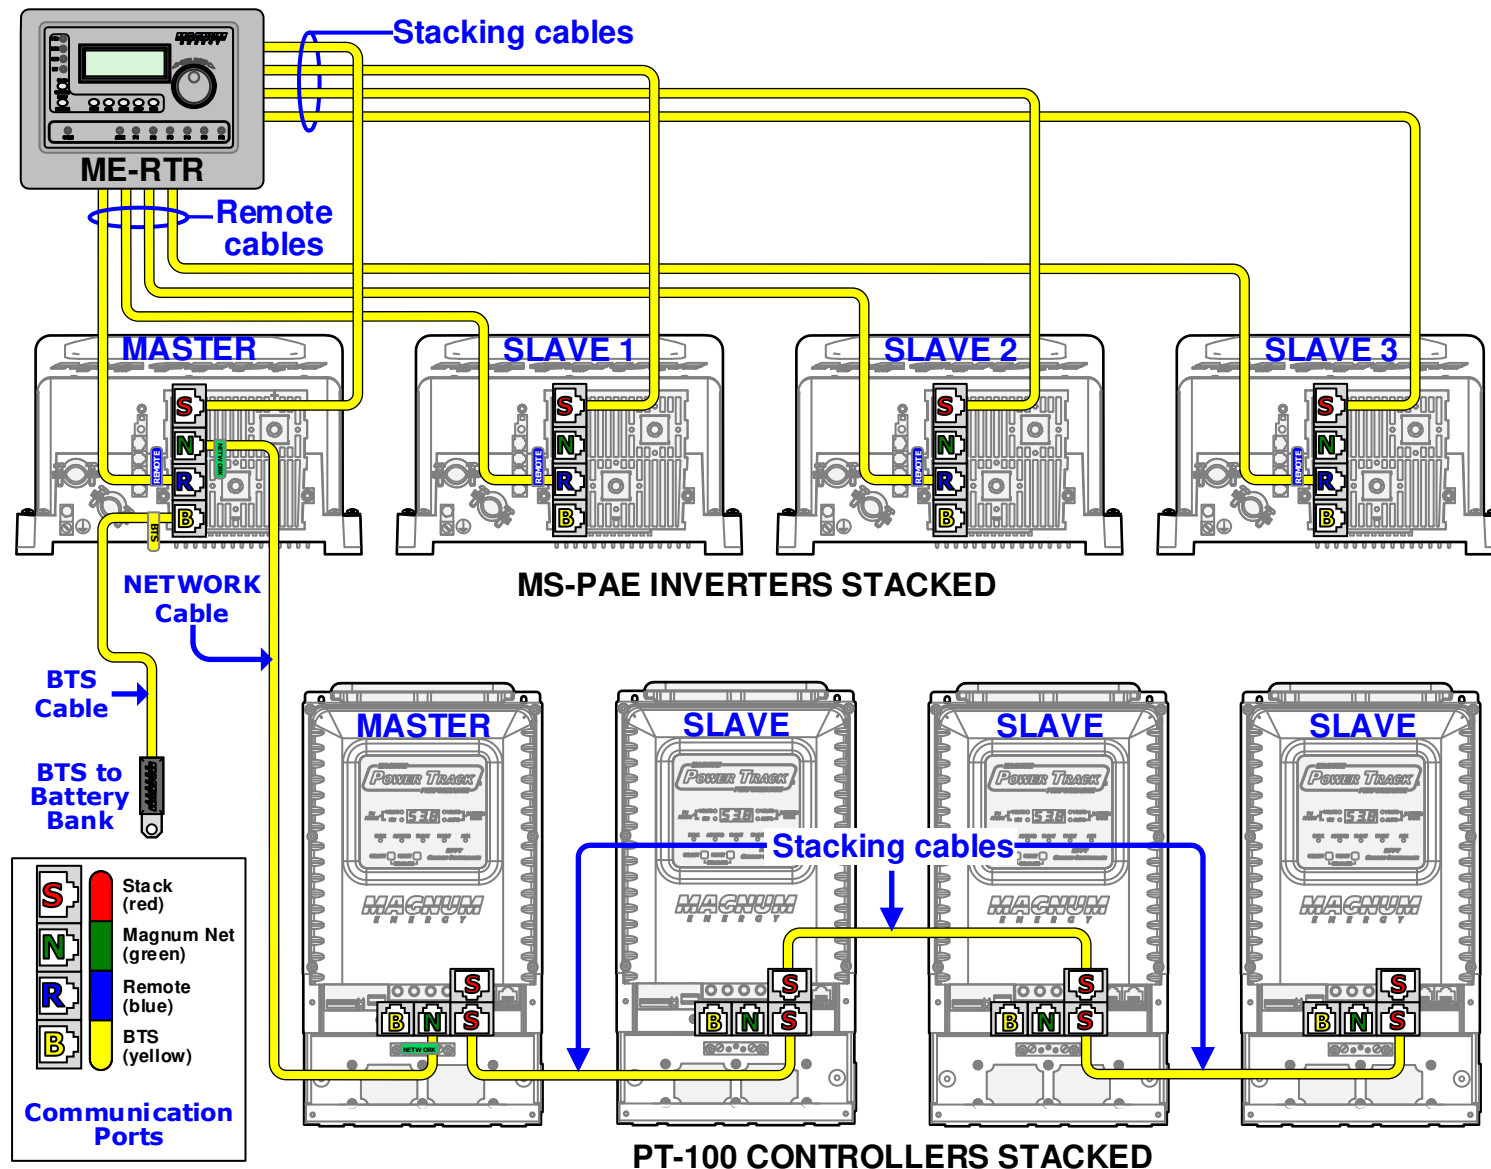


**CAUTION:** Do not network any PT-100 directly to the ME-RTR or damage may occur.  
 Note: A phone-splitter can not be used in any configuration that has the ME-RTR installed.

## Networking the PT-100 with Other Network Devices (Daisy Chain Configuration)

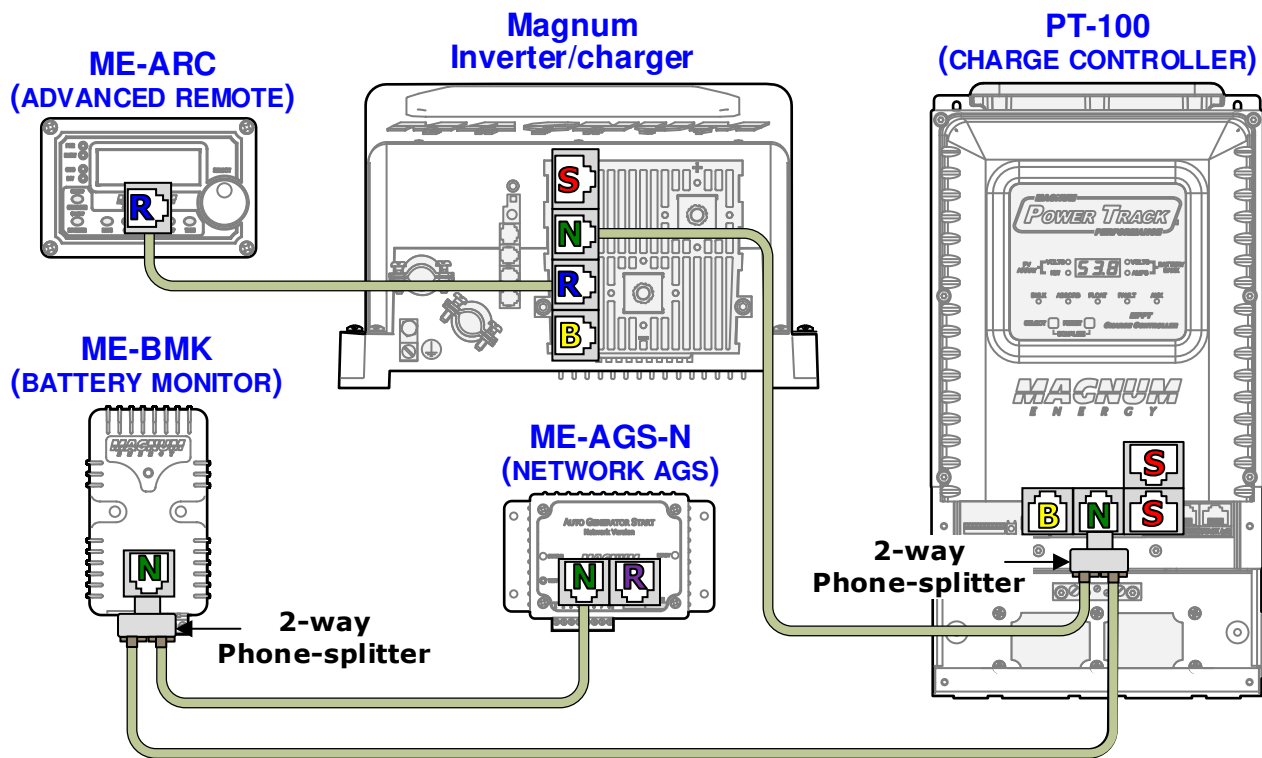


*Note: The ME-AGS-N or PT-100 must be the first network device connected to the inverter, followed by the ME-BMK, and whatever device wasn't used as the first network device (ME-AGS-N or PT-100) is connected after the ME-BMK.*

## Networking the PT-100 with Other Network Devices (Star with Daisy Chain Configuration)

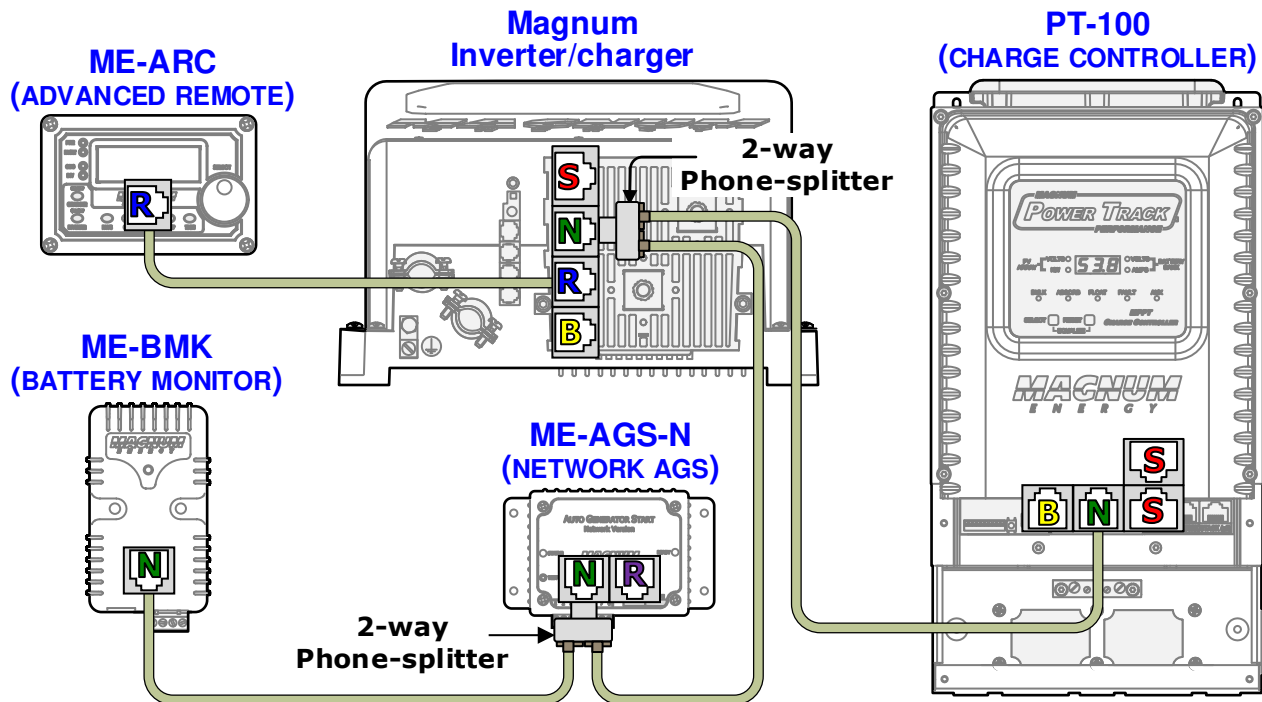

*Note: The ME-AGS-N and PT-100 are the first network devices connected to the inverter, followed by the ME-BMK.*

## Networking the PT-100 with Other Network Devices (Star Configuration using two 2-way splitters)

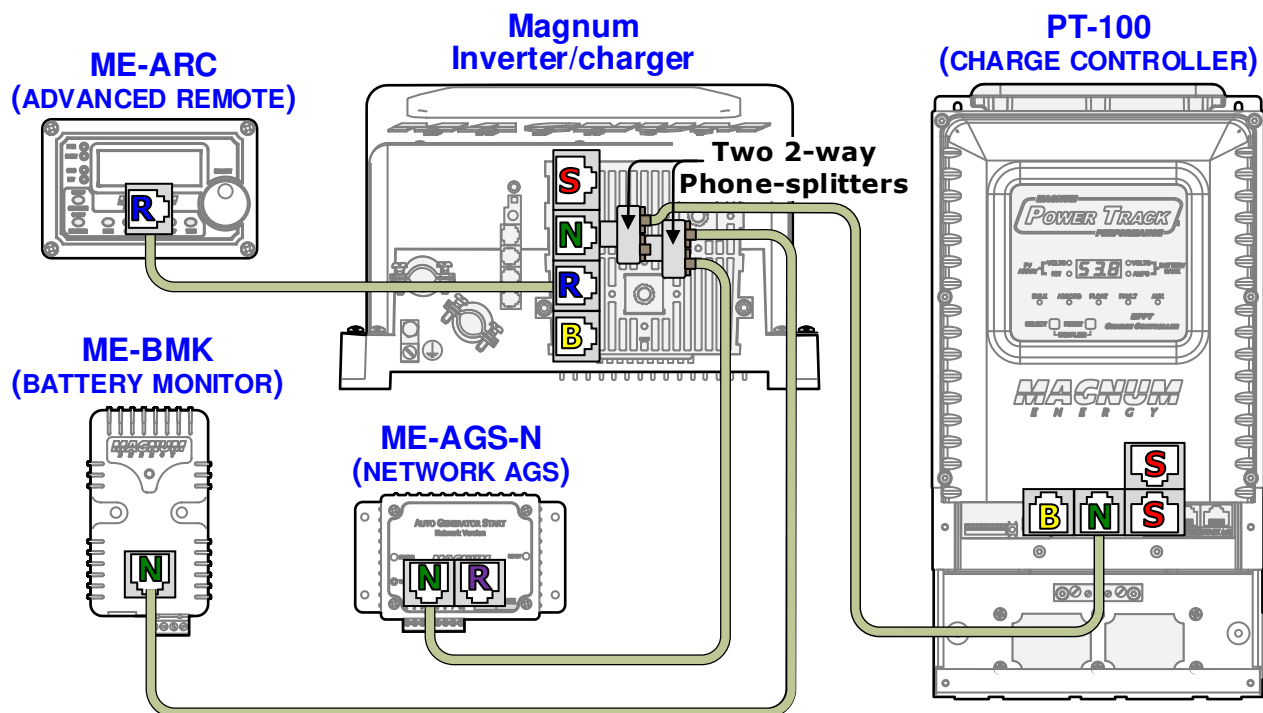

## Networking the PT-100 with Other Network Devices (Star Configuration using a 3-way splitter)

